


pH Test Kit



1. Press the ON / OFF switch once to turn the tester on. Refer to the illustration below.
2. Remove protective cap from the bottom.
3. Immerse the bottom of the tester 1.0 to 3.5 inches into the sample.
4. Using the tester, gently stir the sample for several seconds. When the digital display stabilizes, read the pH value.
5. Rinse the bottom of the tester; replace the cap.
6. For faster response and longer tester life, place several drops of deionized water in the protective cap to prevent the glass bulb from drying out between each use.

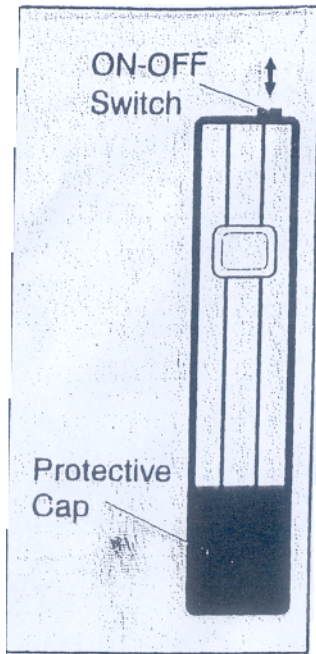